

Delamere Timber Symmetric Canopy BXMW/DEL-SYMM



Standard Unit Dimensions:

Bespoke sizes to suit customer requirements

Framework Material:



Softwood Timber

Product Information

The Delamere Symmetric Canopy offers a beautiful natural finish along with a stylish curved symmetric roof. The width, height and column spacings can all be adapted to suit the existing surroundings. Corners and bends can be easily accommodated using hip joints or individual canopies which overlap.

The Delamere Symmetric can also accommodate side panels to form a partially or fully enclosed outdoor area

Features

- Steel Fin Connection Baseplates
- Softwood Timber
- Multiwall Polycarbonate Roof Cladding

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality
Management
Systems
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED



Delamere Timber Symmetric Canopy BXMW/DEL-SYMM



Guarantees, Warranties, Design-Life and Life-Expectancies


- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour
- 10 year timber guarantee*

*Maintenance and other qualifying criteria apply


Options

- Clear PETg UV or Structured Multiwall Roof Cladding
- Opal or Clear Cladding to Roof and Side Panels
- Side Panels in PETg UV, Multiwall, Glass, Roller Shutters or PVC Roll up Blinds
- Uprights can be solid leg or composite leg
- Guttering & Downpipes: Aluminium or UPVC
- Aluminium Profile Weather Resistant Barriers
- Fixing: Fin Connection Submerged Base Plates, or Wall Fix to building can also be considered with front leg supports only
- Finish: Glulam Beams
- LED lighting or solar lighting
- Full installation service

Diagram

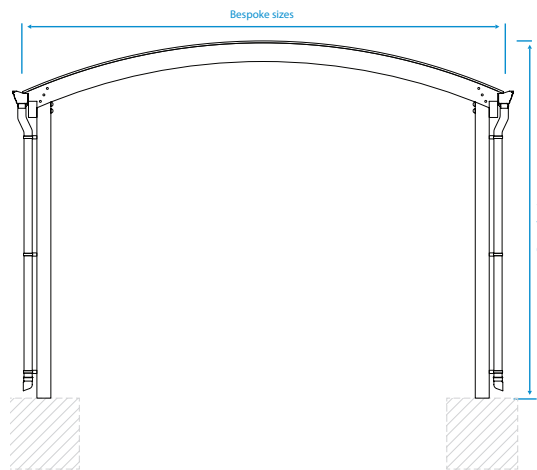

Installation

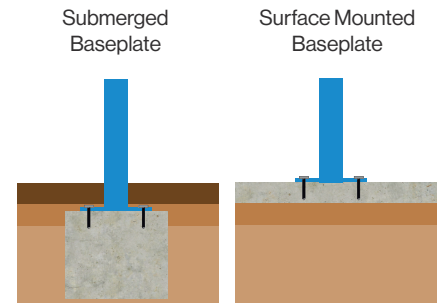

Standard Unit Dimensions:

Bespoke sizes to suit customer requirements

Framework Material:



Softwood Timber

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management Systems
CERTIFIED

ISO 14001
Environmental Management
CERTIFIED

ISO 45001
Occupational Health and Safety Management
CERTIFIED

