





Standard Unit Dimensions:

Width: 2085mm
Height: 2181mm

Length with Capacities:

4100mm (10 cycles)

Colours/Finishes:

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Product Information

This robust cycle shelter demonstrates an industrial aesthetic which will complement any corporate environment. A more traditional and industrial style of the shelter the Premier Senior Economy Cycle Shelter is a simple solution to cycle storage. The shelter is constructed of tough square section components and has fixed base plates for bolting down securely to a level concrete surface.

Features

- Robust Modular Construction
- Load bearing purlins
- Welded end frames
- Made from heavy-duty mild steel box section
- Anti-climb end frames
- Adjustable baseplates
- Hot Dipped Galvanized to BS EN ISO 1461:2009
- Weather resistant cladding

Materials Used

- Framework - Mild Steel
- Cladding - 4mm PETG uv
- Fasteners - Zinc Plated
- Cover Strips - Pre-galvanised steel flat

Finish Options

- Hot-Dip Galvanised to BS EN ISO 1461:2009
- Hot-Dip Galvanised & Polyester Power Coated 60mm-120mm dft
- Hot-Dip Galvanised with Duplex (Zinc Coated) Powder Coating (coastal) 180-240 overall dft

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality
Management
Systems
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED



Premier Economy Cycle Shelter BXMW/PREMS

Weather Resistance

Cladding is UV Stabilised
Wind resistant to 23m/s

Fire Resistance

Cladding is fire tested to '1Y' for BS 476

Guarantees, Warranties, Design-Life and Life-Expectancies

- 25 year structural guarantee*
- 34 year (min) life expectancy for Hot Dip Galvanizing
- 8-10 year life expectancy on standard powder coatings
- 10-15 year life expectancy on Duplex (Zinc Coated) powder coatings
- 10 years' manufacturers guarantees* on cladding material(s)
- 10 years' warranty* on material (only)
- 12 months' warranty* on parts & labour

*Maintenance and other qualifying criteria apply

Options

- Steel profile, trapezoidal roof cladding
- Opal cladding to roof and sides
- Extended adjustable baseplates for submerged fixing
- Helmet lockers
- Powder Coating to a wide range of colours
- LED or solar lighting
- Full Installation Service
- Varied Range of Cycle Racks
- Varied Range of Cycle Stands


Standard Unit Dimensions:

Width: 2085mm
Height: 2181mm

Length with Capacities:


4100mm (10 cycles)

Colours/Finishes:


		
		
		
		

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Diagram

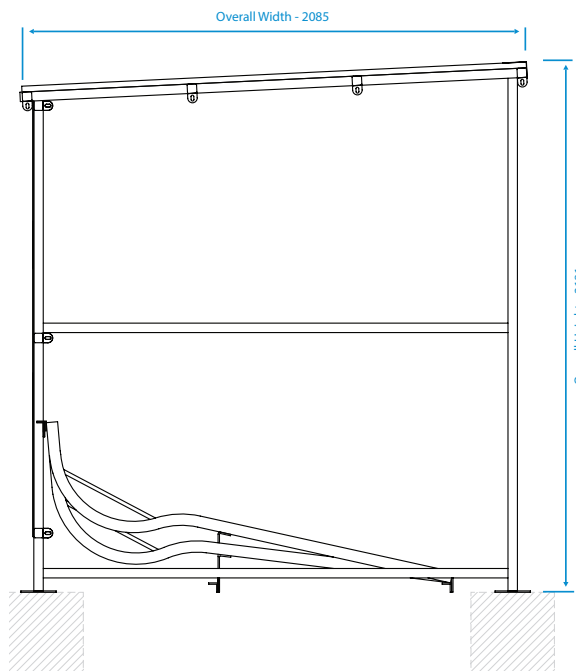

Installation

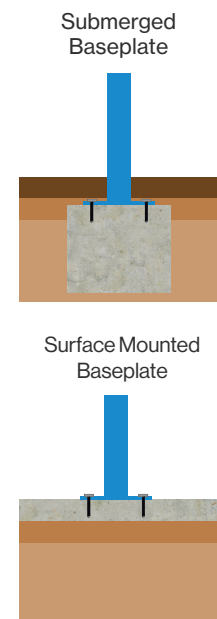

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management Systems
CERTIFIED

ISO 14001
Environmental Management
CERTIFIED

ISO 45001
Occupational Health and Safety Management
CERTIFIED

