

Easi-Riser 2-Tier Cycle Rack (Lift Assisted) with Sheffield Cycle Rack BXMW/EASI-RISER



Recommended Area Requirements

Height: 1824mm

Length with Capacities:

- 575mm (4 Cycles)
- 950mm (6 Cycles)
- 1325mm (8 Cycles)
- 1700mm (10 Cycles)
- 2075mm (12 Cycles)
- 2450mm (14 Cycles)
- 2825mm (16 Cycles)
- 3200mm (18 Cycles)
- 3575mm (20 Cycles)

Finish:



Galvanised Only Finish

The colours shown are a guide only. Please check a colour chart to see the actual colour.

Product Information

The Easi-Riser is more compact than other two-tier options - this makes it ideal for space-saving storage when ceiling height is a consideration.

This two-tier cycle storage system is a cost effective option for space-saving cycle storage. Not only this, but the Easi-Riser includes a gas strut mechanism as standard - this makes operation of the upper level troughs exceptionally easy and all the more accessible.

Features

- Each set of four "cycle spaces" consists of two upper-tier troughs and one lower-tier Sheffield hoop.
- Sheffield racks can be easily swept clean.
- Staggered upper level troughs allow for varying cycle hand bars to avoid clashing and enable easy operation.
- Gas strut lift assist mechanism for easy loading/unloading on upper tier.
- Can contribute towards gaining ENE8 credits when used in the appropriate situation, under the Code for Sustainable Homes.
- BREEAM and Code for Sustainable Homes Compliant.

Materials Used

- Framework - Mild Steel

Finish Options

- Galvanised to BS EN ISO 1461:2009

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality
Management
Systems
CERTIFIED

ISO 14001
Environmental
Management
CERTIFIED

ISO 45001
Occupational
Health and Safety
Management
CERTIFIED



Easi-Riser 2-Tier Cycle Rack (Lift Assisted) with Sheffield Cycle Rack BXMW/EASI-RISER




Guarantees, Warranties, Design-Life and Life-Expectancies

- 12 months' warranty* on parts & labour
- *Maintenance and other qualifying criteria apply

Options

- Sizes options based on cycle capacity
- Finish: framework, lower rack and upper trough/runners are galvanized only

Diagram

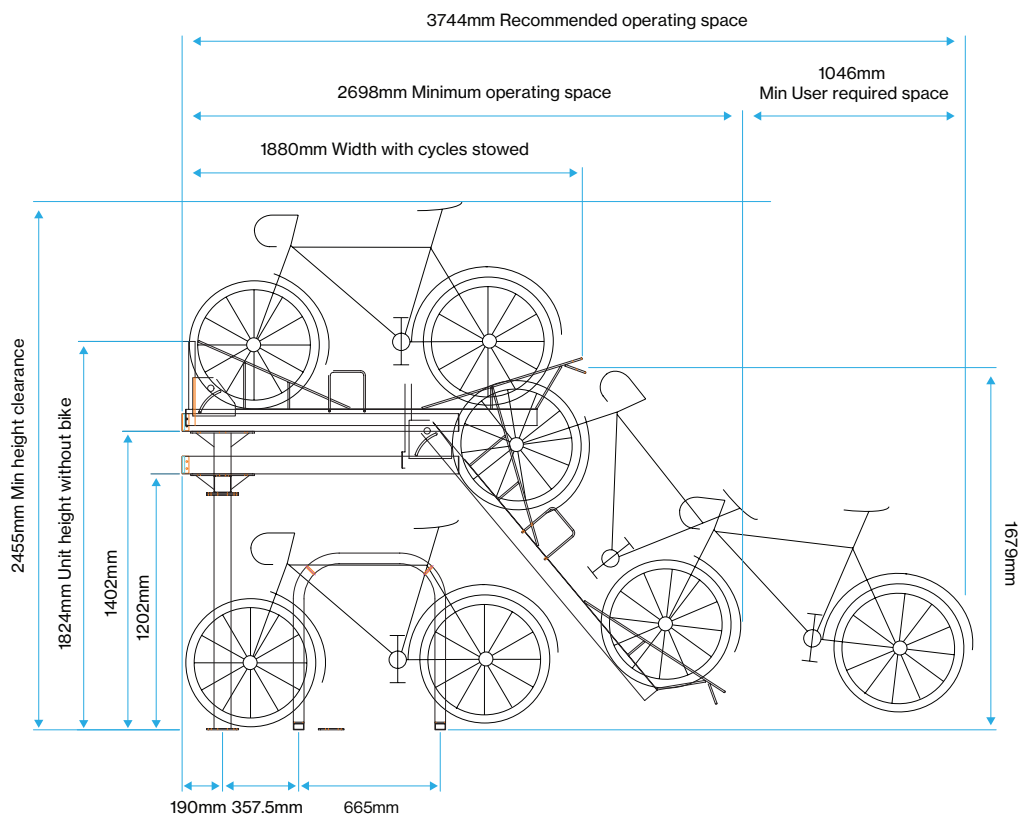

Recommended Area Requirements

Height: 1824mm

Length with Capacities:

- 575mm (4 Cycles)
- 950mm (6 Cycles)
- 1325mm (8 Cycles)
- 1700mm (10 Cycles)
- 2075mm (12 Cycles)
- 2450mm (14 Cycles)
- 2825mm (16 Cycles)
- 3200mm (18 Cycles)
- 3575mm (20 Cycles)

Finish:



Galvanised Only Finish

The colours shown are a guide only.
Please check a colour chart to see the actual colour.

Broxap Limited, Rowhurst Industrial Estate, Chesterton, Newcastle-under-Lyme, Staffordshire, ST5 6BD T: 01782 564411 E: info@broxap.com W: www.broxap.com



ISO 9001
Quality Management Systems
CERTIFIED

ISO 14001
Environmental Management
CERTIFIED

ISO 45001
Occupational Health and Safety Management
CERTIFIED

